



VOLVO


WORKSHOP BULLETIN

CARS

RE:	PRODUCT
PROPELLER SHAFT	P
	GROUP
	45
	NO.
	3
DATE	
September 1967	

Special socket SVO 2779 for flange bolt removal/installation

A special socket has been introduced which is connected to an air impact wrench for removal and installation of flange bolts. The across-flats width of the socket is 11 mm (.43") and fits into the air impact wrench with a 1/2" square (extension).

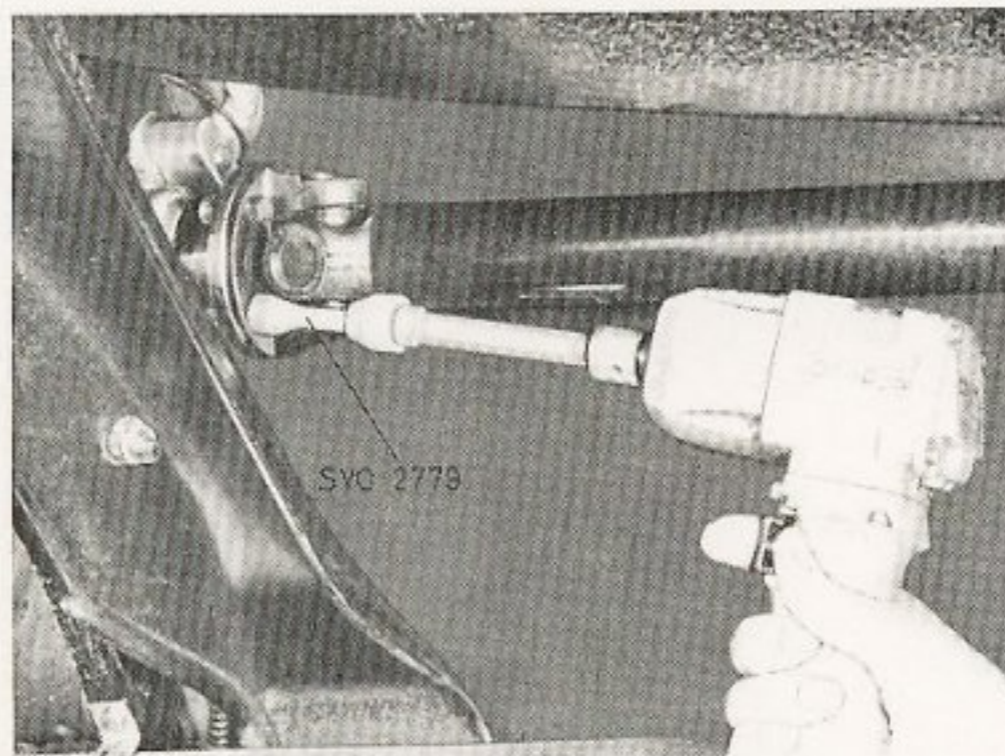

VOLVO
110522